

NATIONAL UNIVERSITY OF SCIENCE AND TECHNOLOGY

FACULTY OF INDUSTRIAL TECHNOLOGY
BACHELOR OF ENGINEERING (HONS) DEGREE
Part Two Supplementary Examination October 2009

TCE2105 Fluid Flow

Duration of Examination 3 Hours

Instructions to Candidates:

1. Answer ALL FIVE questions.
2. Each question carries equal marks.
3. Show all steps clearly in your calculation.
4. Start the answers for each question on a new page.

-
1. (a) Where does most of the energy loss occur in a Venturi meter and why is this the case?


(8 marks)

(b) A Venturi meter is being calibrated in a laboratory. The meter is lying horizontally and has a diameter of 75 mm at the entrance and 50 mm at the throat. The flow rate is obtained by measuring the time required to collect a certain quantity of water. The average number of such measurements gives 0.614 m^3 of water flowing in 55.82 seconds. If the pressure gauge at the throat reads 20 kN/m^2 less than that at the entrance, calculate the head loss due to friction using the Bernoulli equation.

(12 marks)

2. A pipeline of constant 0.6 m diameter with its centre line in the horizontal plane turns through an angle of 75° . The pipeline carries water at the rate of $0.85 \text{ m}^3/\text{s}$. A pressure gauge at the bend indicates that the pressure is equivalent to 41.3 m of water. Calculate the force exerted on the bend by the water and the direction it acts.

(20 marks)

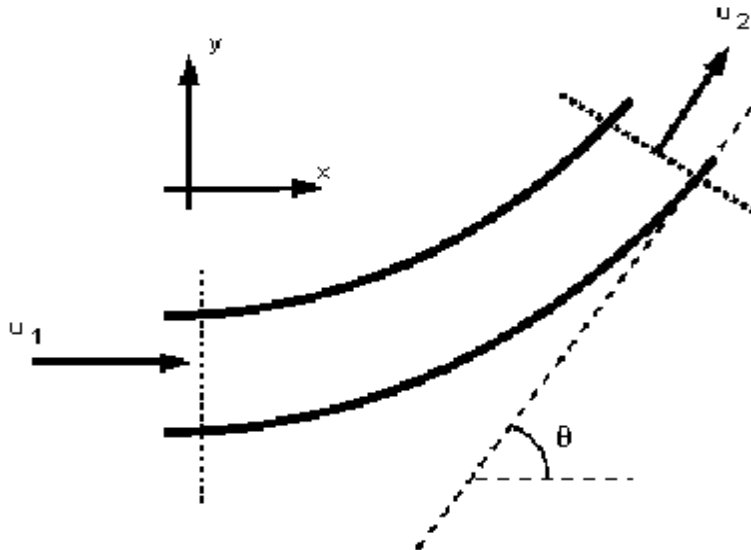

3. Explain with a complete description of the mechanisms at work, what is meant by the following phrases.
- Laminar flow (5 marks)
 - Turbulent flow (5 marks)
 - Boundary layer (5 marks)
 - Boundary layer separation (5 marks)

4. In an experiment water is flowing over an 80° V-notch - Figure 2 - with a constant head of 0.3 m into a vertical cylindrical tank of diameter 0.5 m.

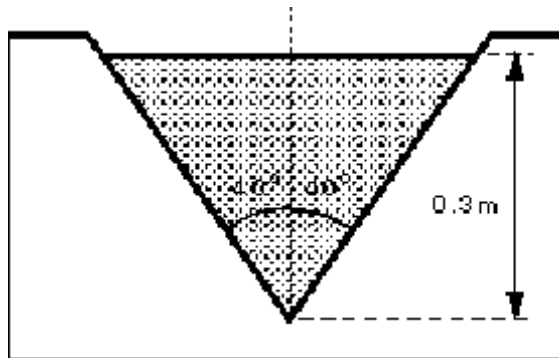


Figure 2

If the level in the tank rises 0.8 m in 20 seconds, deriving all formulae, determine the coefficient of discharge of the notch.

(20 marks)

5. a) 75% sulphuric acid, of density 1650 kg/m^3 and viscosity $8.6 \text{ mN}\cdot\text{s/m}^2$, is to be pumped for 0.8 km along a 50mm internal diameter pipe at the rate of 3.0 kg/s, and then raised vertically 15m by the pump. If the pump is electrically driven and has an efficiency of 50%, what is the power required? What type of pump would you use and of what material would you construct the pump and pipe? Take $R/\rho u^2 = 0.004$ ($e = 0.046\text{mm}$) where R is the resistance to flow per unit area of pipe surface.

(15 marks)

b) Describe how an air lift pump works.

(5 marks)